


Data Sheet  
24v Chain Motor

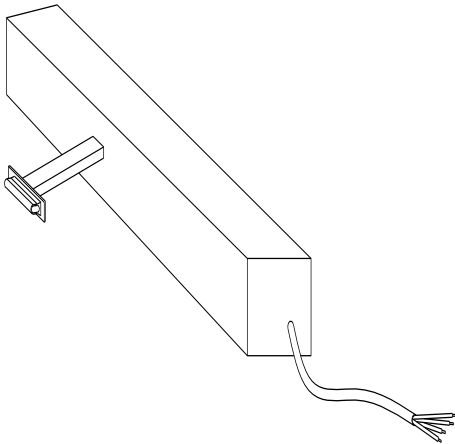

*Manufacturers of Access Products*

Leamore Close · Leamore Enterprise Park · Walsall  
West Midlands · WS2 7NL · England

Telephone: +44 (0)1922 711185 · Fax: +44 (0)1922 497943

Email: [sales@surespancovers.com](mailto:sales@surespancovers.com)

[www.surespancovers.com](http://www.surespancovers.com)

[www.jakdor.co.uk](http://www.jakdor.co.uk)


Voltage: 24v D.C. @ 1.5 Amps (*see wiring diagram for further info*)

Loading: 500 Newtons Push / Pull

Stroke Length: upto 350mm (*programmable at factory only*)

Testing: Tested to 11,000 cycles  
And compliant with EN12101-2 (*chain drive only not hatch*)

Upto 4 chain drives can be connected for synchronous operation but control panel may differ depending on amount of power

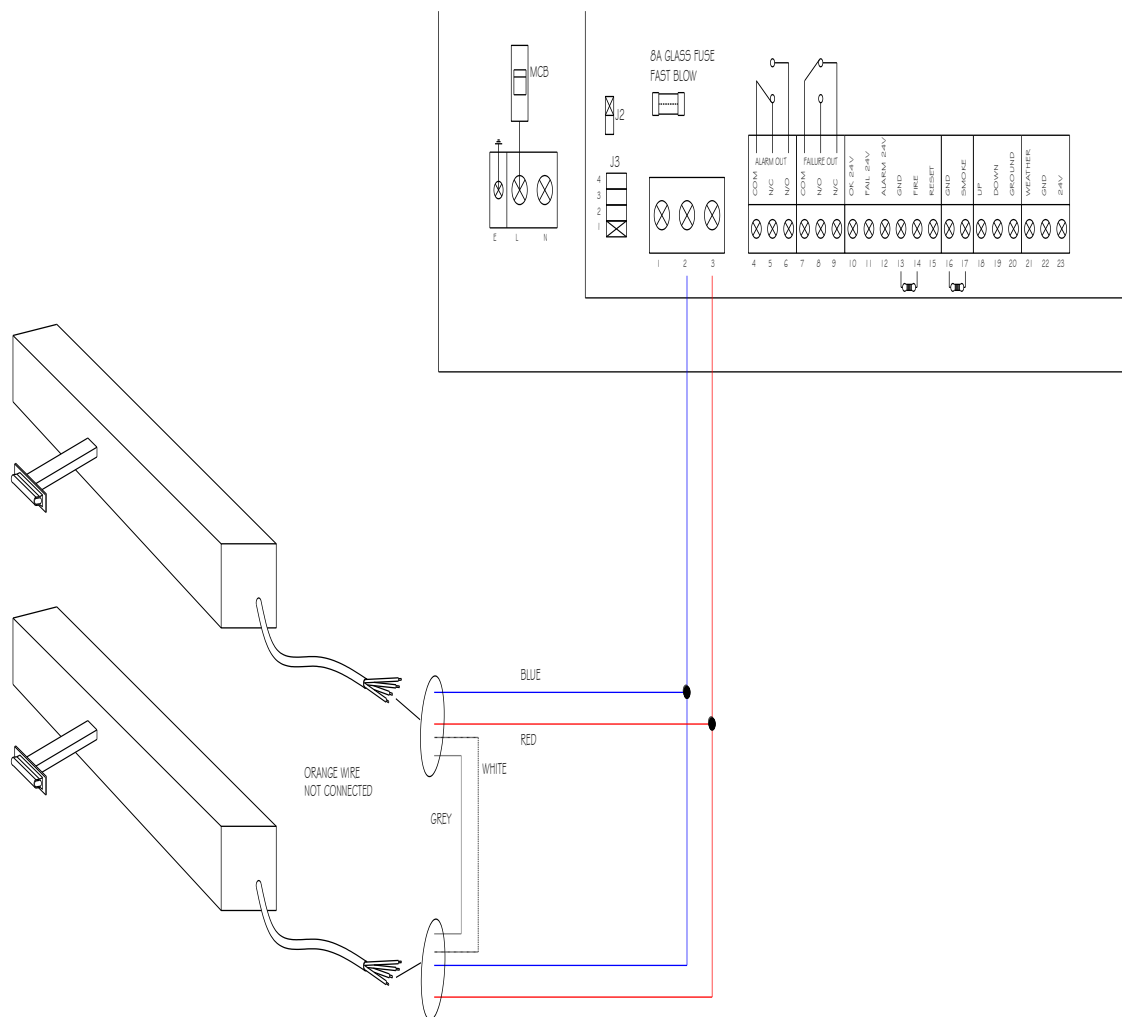

## Connection of 2 chain motors to 5A control panel

Both blue wires to terminal 2

Both red wires to terminal 3

Connect both white wires together for communication

Connect both grey wires together for communication

Orange wires not connected

In the control panel move jumper J3 to 2 (2 chain motor connection)